



| 3 Decades of Experience in Packaging
| Multiple Country Operations

| 800+ Channel Partners
| 60+ Service Centres





HAND OPERATED SEALING MACHINES

Ideal for sealing heat sealable poly pouches | Hand operated Impulse (instant) sealing | Hot bar sealers for laminated pouches | Adjustable electronic timer | Audio visual sealing indicators | Suitable for packing solids, granules and powders | Round element option for simultaneous sealing and cutting

TECHNICAL SPECIFICATIONS

| Model | Seal (mm) | | Power | | Dimension (mm) | | | Weight Kg. |
|------------------------|-----------|-------|-------|-----|----------------|----|-----|---------------|
| | Length | Width | V | W | L | B | H | |
| Impulse Sealers | | | | | | | | |
| 190 HW | 190 | 3 | 240 | 290 | 320 | 85 | 230 | 3 |
| 200 HB | 200 | 1.6 | 240 | 200 | 320 | 85 | 230 | 3.0 |
| 200 D V2 | 200 | 1.6 | 240 | 170 | 320 | 85 | 230 | 2.25 |
| 250 Delta | 250 | 1.6 | 240 | 270 | 350 | 85 | 250 | 3.6 |
| 300 Delta | 300 | 1.6 | 240 | 300 | 420 | 85 | 230 | 4.3 |
| 300 HB | 300 | 1.6 | 240 | 300 | 410 | 85 | 250 | 4.5 |
| 300 HW | 300 | 3 | 240 | 380 | 420 | 85 | 270 | 4.6 |
| 400 HB | 400 | 1.6 | 240 | 380 | 520 | 85 | 270 | 5.4 |
| 500 HB | 500 | 1.6 | 240 | 440 | 630 | 85 | 300 | 7.3 |
| 400 D | 400 | 1.6 | 240 | 340 | 520 | 85 | 270 | 5.2 |
| Hotbar Sealers | | | | | | | | |
| 200 HH | 200 | 12 | 240 | 120 | 340 | 85 | 190 | 2.6 |
| 300 HH | 300 | 12 | 240 | 200 | 410 | 85 | 250 | 3.0 |



F series

FOOT OPERATED SEALING MACHINES

F series (Premium) Model variants

Adjustable electronic timer | Tilttable sealing jaw | Adjustable bag rest | Ease of operation | High productivity | Visual indication during sealing | Audio indication at the end of sealing | Hot bar sealer with energy regulator for sealing laminated pouches

TECHNICAL SPECIFICATIONS

| Model | Seal (mm) | | Power | | Dimension (mm) | | | Weight Kg. |
|------------------------|-----------|-------|-------|-----|----------------|-----|------|---------------|
| | Length | Width | V | W | L | B | H | |
| Impulse Sealers | | | | | | | | |
| QS 200 F | 200 | 1.6 | 240 | 280 | 660 | 620 | 1050 | 17 |
| QS 200 FE | 200 | 5 | 240 | 470 | 660 | 620 | 1050 | 18 |
| QS 200 FP | 200 | 3x2 | 240 | 750 | 660 | 620 | 1050 | 22 |
| QS 300 F | 300 | 1.6 | 240 | 400 | 660 | 620 | 1050 | 19 |
| QS 300 FE | 300 | 5 | 240 | 800 | 660 | 620 | 1050 | 22 |
| QS 300 FP | 300 | 3x2 | 240 | 800 | 660 | 620 | 1050 | 24 |
| QS 400 F | 400 | 1.6 | 240 | 470 | 660 | 620 | 1050 | 20 |
| QS 400 FE | 400 | 5 | 240 | 720 | 660 | 620 | 1050 | 23 |
| QS 500 F | 500 | 1.6 | 240 | 560 | 660 | 620 | 1050 | 20 |
| QS 500 FE | 500 | 5 | 240 | 750 | 660 | 620 | 1050 | 23 |
| QS 600 F | 600 | 1.6 | 240 | 650 | 700 | 620 | 1050 | 23 |
| QS 600 FE | 600 | 5 | 240 | 920 | 700 | 620 | 1050 | 26 |
| QS 900 F | 900 | 1.6 | 240 | 950 | 1000 | 620 | 1050 | 30 |
| Hotbar Sealers | | | | | | | | |
| 200 FH | 200 | 12 | 240 | 200 | 660 | 620 | 1050 | 24 |
| 300 FH | 300 | 12 | 240 | 270 | 660 | 620 | 1050 | 26 |
| 400 FH | 400 | 12 | 240 | 350 | 660 | 620 | 1050 | 28 |



DELTA SERIES (ECONOMY)

No tilting facility; F D- Standard model,
FE D-5mm sealing Width, FP D- Two parallel 3mm wide seals, FHE D- Hot bar sealers

TECHNICAL SPECIFICATIONS

| Model | Seal (mm) | | Power | | Dimension (mm) | | | Weight Kg. |
|------------------------|-----------|-------|-------|-----|----------------|-----|------|------------|
| | Length | Width | V | W | L | B | H | |
| Impulse Sealers | | | | | | | | |
| 300 F D | 300 | 1.6 | 240 | 400 | 500 | 500 | 1000 | 17 |
| 300 FE D | 300 | 5 | 240 | 600 | 500 | 500 | 1000 | 18 |
| 300 FP D | 300 | 3x2 | 240 | 800 | 500 | 500 | 1000 | 19 |
| 400 F D | 400 | 1.6 | 240 | 470 | 500 | 500 | 1000 | 22 |
| 400 FE D | 400 | 5 | 240 | 720 | 500 | 500 | 1000 | 24 |
| Hotbar Sealers | | | | | | | | |
| 200 FHE D | 200 | 12 | 240 | 130 | 500 | 530 | 930 | 14 |
| 300 FHE D | 300 | 12 | 240 | 200 | 500 | 530 | 930 | 17 |
| 400 FHE D | 400 | 12 | 240 | 200 | 500 | 530 | 930 | 20 |



CONTINUOUS SEALERS

To seal different types of pre filled flexible bags continuously. Applications in various industries like food processing, chemicals, engineering.

Features

- | Adjustable temperature models suitable for a wide spectrum of materials | Variable speed conveyor | Vertical / Horizontal mountable models | PID controllers are suitable for virgin plastic pouches.
- | H- Horizontal model | HV- Convertible into horizontal or vertical | V- Vertical model | CS- Continuous sealer (suitable for laminates)

TECHNICAL SPECIFICATIONS SCSD 3VP & SCS 3H

| Conveyor Load | Sealing Width (mm) | Type | Models Available | Power Consumption |
|---------------|--------------------|------------|---|-------------------|
| 3 Kg | 10 to 12 | Horizontal | PID, Digital, Intelligent & Dual Sensor | 750W |
| 15 Kg | 10 to 12 | Vertical | PID, Digital, Intelligent & Dual Sensor | 800 |

TECHNICAL SPECIFICATIONS FRB MODELS

| Model | Sealing Width (mm) | Max. Load | Power | Speed (M/Min) | Controller |
|------------------|--------------------|-----------|-------|---------------|------------|
| FRB-770 H/HV | 12 | 3 Kg | 240V | 0 -12 | Analog |
| FRB-770 H/HV PID | 12 | 3 Kg | 240V | 0 -12 | PID |



DI 380 W

DI 380

DRY INK CODER


Ideal for printing statutory markings / coding on plastic / paper pouches, duplex boards / duplex cartons, labels etc.

Features

! Higher production speeds ! Pouches / labels can be fed in batches ! Uses hot melt ink ! No ink spillage ! No over inking ! Lower coding costs, easy to compose messages ! Equipped with print counter/ preset counter ! Photo electric sensor for position adjustment ! Print wheel adjustable

TECHNICAL SPECIFICATIONS

| Model | DI 380 | DI 380W |
|-----------------|---------------------------------|---------------------------------|
| Power | 240 V / 180 W | 240 V / 180 W |
| Print Speed | up to 200 Pcs./ Min. | up to 200 Pcs./ Min. |
| Print area | 5 lines of 10 characters each | 5 lines of 10 characters each |
| Object size | L : 50 ~ 500 mm, B : 15 ~ 195mm | L : 50 ~ 500 mm, B : 15 ~ 320mm |
| Type sizes | 2mm & 3mm | 2 mm & 3mm |
| Ink roller size | 35 X 32mm | 35 X 32mm |
| Dimensions(mm) | 440 X 350 X 285 | 440 X 475 X 285 |
| Weight | 23 Kgs. | 26 Kgs. |

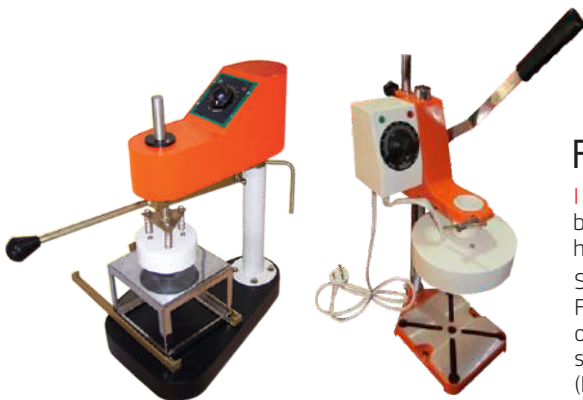

Foil Sealer (FS)

Foil Sealer Delta

FOIL SEALERS

! For pilfer evident and leak proof sealing of aluminum foils on cups, cans, bottles, plastic containers and trays ! Height adjustability and provision for heat control

Strong cups, cans and bottles can be sealed without extra attachments. Flimsy cups and trays require extra support at the bottom of the neck, otherwise the cup/neck may be crushed during sealing operation. The support has to be matched with the shape of the cup to be sealed. (Provide dimensional sketches or samples for design of appropriate support)

TECHNICAL SPECIFICATIONS

| Model | Height of the Containers | Sealing Dia Max | Power Watts | Voltage | L | B | H | Weight Kg |
|----------|--------------------------|-----------------|-------------|---------|-----|-----|-----|-----------|
| FS 1045 | 0 to 450mm | 90mm | 200 | AC 240 | 560 | 250 | 650 | 8.5 |
| FS 1545 | 0 to 450mm | 140mm | 300 | AC 240 | 560 | 250 | 650 | 11 |
| FS 2045 | 0 to 450mm | 190mm | 450 | AC 240 | 560 | 250 | 650 | 13.5 |
| FSD 1045 | 0 to 170mm | 90mm | 200 | AC 240 | 460 | 170 | 250 | 4 |
| FSD 1545 | 0 to 170mm | 140mm | 300 | AC 240 | 460 | 170 | 250 | 4.5 |



SEMI AUTOMATIC L-SEALER

L-Sealers a cost effective L-Sealing solution for wrapping using polyolefin (POF) film. The sealers are equipped with film separator cum product placement table and pouch puncturing device. The magnetic hold-down mechanism helps reduce operator fatigue. The L-Sealer can be used combination with Sepack's Shrink Tunnels.

Features:

| Round element | Floor standing | Film separator | Film roll stand | Film puncturing device | Magnetic hold down mechanism | Sealing-cooling timers

TECHNICAL SPECIFICATIONS

| Model | Voltage | Power | Max. Sealing dimension (mm) | | Max. Dimension (mm) | Weight |
|-----------|---------|--------|-----------------------------|---|---------------------|--------|
| | | | L x W | H | | |
| BSL-5045L | 220V | 1.2 KW | 500 x 450 | | 1400 x 700 x 1000 | 110Kg |
| BSF-501 | 220V | 10 KW | 500 x 350 | | 950 x 550 x 650 | 35Kg |



SHRINK WRAPPING MACHINE

This is a cost effective shrink tunnel with various features. PE, PVC, POF and PP shrink films can be used with this machine. This model is suitable for medium production capabilities. These shrink tunnels can be used in combination with L-sealers or other wrapping equipments. Shrink wrapping protects your product against scratches, dust, pilferage, bundle your product or give it some extra gloss with a strong, tight, tamper evident over-wrap.

TECHNICAL SPECIFICATIONS

| Model | Voltage | Max. Load | Tunnel Window | | Dimension (mm) | Conveying Speed | Weight |
|---------|----------|-----------|-----------------|---|-------------------|-----------------|--------|
| | | | L x W x H | H | | | |
| BS4525A | 220V/380 | 6.5KW | 900 x 450 x 250 | | 1200 x 700 x 1000 | 0-10m/min | 90kg |



TABLETOP VACUUM PACKING MACHINE

Vacuum packaging removes air from the pouch and seals it in an airtight manner. Vacuum packaging extends the shelf-life and helps preserve the quality of the product. Sepack's tabletop vacuum packaging machine is compact machine capable of producing high levels of vacuum.

TECHNICAL SPECIFICATIONS

| Model | Voltage | Power | Sealing length | Sealing width | Vacuum Pump capacity | Cycle time | Max. Dimension (mm) | | Weight |
|-----------|---------|--------|----------------|---------------|----------------------|------------|---------------------|---|--------|
| | | | | | | | L x W x H | H | |
| YS-ZS-550 | 220V | 1.0 KW | 400mm | 8mm | 20m ³ /H | 15~40 Sec. | 500 x 530 x 490 | | 68Kg |



BOX STRAPPING MACHINES

It is used for strapping secondary cartons, containers, wooden boxes etc. with PP / PE straps. Two models available viz. High Table model and Low Table model.

Features: | Easy to use | Adjustable strapping tension | Adjustable strapping temperature | Adjustable feed length

TECHNICAL SPECIFICATIONS

| Model | SBS 12 | DBA 200 |
|----------------------------|------------------------------------|----------------------------------|
| Supply | 240VAC / 50Hz | 240VAC / 50Hz |
| Power Consumption | 250W | 1000W |
| Machines Dimension (LxBxH) | 897mm x 570mm x 785mm | 1650 x 620 x 1550 |
| Machines Weight | 61Kg | 215Kg |
| Strap Width | 6mm to 12mm | 12mm |
| Strap Thickness | 0.6mm to 0.8mm | 0.8mm |
| Cycle Speed (Avg) | 2.5 sec (Depending on Pack Size) | 2.5 sec (Depending on Pack Size) |
| Min Pack Size (LxBxH) | 100mm x 100mm x 100mm | 100mm x 100mm x 100mm |
| Max Pack Size (mm) | Virtually No Limit* | (B) 850 x (H) 590 |
| Max Pack Weight | 100Kg (Max 23gms/cm ²) | 100Kg (15gms/cm ²) |

*Doesn't Change the Machine's Center of Gravity # Use Virgin Strap for Better Strapping



CARTON SEALERS

This machine is used for top and bottom sealing of carton (secondary) boxes using BOPP tapes.

Features:

| Used for wide range of carton dimensions | Easy to change carton sizes | Roller conveyors at input & output side | Adjustable conveyor height | Special belt conveyors giving firm grip | Carton Holding rollers | Mounted on castor wheels

TECHNICAL SPECIFICATIONS

| Model | MH MD | MH MA | MH FJ |
|---------------------|-------------------------------|-------------------------------|-------------------------------|
| Supply | 240VAC / 50Hz / 400W | 240VAC / 50Hz / 400W | 240VAC / 50Hz / 600W |
| Dimension (LxBxH) | 1450mm x 915mm x 1650mm | 1640mm x 790mm x 1650mm | 2030mm x 1020mm x 1660mm |
| Weight | 80Kg | 100Kg | 150Kg |
| Conveyor Height | 660mm to 750mm | 660mm to 750mm | 480mm to 540mm |
| Conveyor Speed | 19 m/min | 19 m/min | 19 m/min |
| Min Pack Size (BxH) | 145mm x 120mm | 145mm x 150mm | 145mm x 130mm |
| Max Pack Size (BxH) | 500mm x 488mm | 480mm x 450mm | 430mm x 580mm |
| Tape Width | 48mm to 62mm | 48mm to 62mm | 48mm to 72mm |
| Tape | BOPP / PVC self adhesive tape | BOPP / PVC self adhesive tape | BOPP / PVC self adhesive tape |



Sepack Ice Candy Filler

Making automatic Ice Candy (Sip-up) Filler is not a kid's play. Like the state-of- art Ice Candy Filler with automatic control from Sepack. The machine tirelessly packs different length of pouches at same speed. The pouch length is adjustable according to the demands of the market. The sealing is perfect for safe transport and storage without spilling. Not only that, the machine can pack any liquid with low viscosity, opening-up new opportunities in packing a wide range of products in innovative packs.

Features:

| Speed: 35 Pack / min | Pouch length: Can be adjusted from 75mm to 165mm | Collar Sizes - 65mm, 95mm & 120mm



Sepack Impulse Sealers

Eliminating the errors of manual process, Sepack presents a digitally intelligent range of automatic impulse sealing machines with state-of-art features. Like microprocessor control for accurate timing, electro-magnetic jaw for perfect sealing pressure. Automatic or foot switch operated process control and more. An automatic impulse sealer for fast and perfect packaging of a wide range of products. Excellent for supermarkets and FMCG sectors.

FEATURES

| Sealing width: 5 mm | Sealing speed: 20 pouches/min | Dual operation modes: Automatic: Continuous operation with pre-set timer. Manual-Foot- switch based operation control.

Models available - AIS 350, AIS 450 & AIS 600

*Pouch used for testing:10 micron thickness multilayer pouch, pouch placing time not included.



Sepack Double Head Weigher

| Electrically operated | Double head, independent & combined net weighing
| Weighing range 50 gms to 1000 gms



Sepack Lanka (PVT) LTD. No. 313, Kandy Road, Peliyagoda-11830, Sri Lanka, Ph: 011-2915680, Mob:072 4114928, 0766993353, E-mail:sts@sevana.com | www.sepack.in